

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

10



Europäisches Patentamt
European Patent Office
Office européen des brevets

11 Publication number:

0 114 964
A1

12

EUROPEAN PATENT APPLICATION

21 Application number: 83111741.1

51 Int. Cl.³: **A 61 J 1/00**
C 08 L 23/04, C 08 L 53/00

22 Date of filing: 24.11.83

30 Priority: 02.12.82 US 446303

43 Date of publication of application:
08.08.84 Bulletin 84/32

84 Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

71 Applicant: MILES LABORATORIES INC.
Fourth and Parker Streets P.O. Box 1986
Berkeley California 94701(US)

72 Inventor: Mahal, Mohan S.
607 Odin Drive
Pleasant Hill California 94523(US)

74 Representative: Senftl, Hannes, Dr. et al,
c/o Bayer AG Konzernverwaltung RP Patentabteilung
D-5090 Leverkusen Bayerwerk(DE)

54 Polymer blend and flexible container made thereof.

67 Film material for use in sterilized medical solution containers such as blood bags or I. V. bags, comprising 30 - 90% linear low density polyethylene (LLDPE) and 10 - 70% styrene-ethylene-butylene-styrene (SEBS). The particular LLDPE and SEBS materials are selected from among known LLDPE and SEBS materials according to density, in the case of LLDPE, and styrene/rubber ratio and composition in the case of SEBS. Up to 10% of an optional third component such as high melt index LLDPE or polypropylene may be added as a processing aid. Material having greater than 50% LLDPE is particularly well suited for medical solution container application.

EP 0 114 964 A1

POLYMER BLEND AND FLEXIBLE CONTAINER MADE THEREOF

Background of the Invention

5 Field of the Invention: The present invention relates to plastic containers for medical fluids such as intravenous solutions and blood, and more particularly, to a fabricated film container having a novel film material.

10 Prior Art: A number of film materials are known for use in medical fluid containers. A widely used material in the past has been polyvinyl chloride, which is used at the present time in blood bags and in commercially available flexible intravenous solution containers. Polyvinyl
15 chloride, however, is disadvantageous in that it is often formulated so as to be brittle at low temperatures and to contain plasticizers which may be extracted by certain intravenous solutions.

20 Several polyolefins are also known for application in the field of medical containers, particularly in semi-rigid containers, with rigid shoulder and/or base portions, which assume a free-standing shape and collapse upon withdrawal of the container's contents. This design eliminates the
25 need for an air inlet in such containers, an important advantage of flexible medical fluid containers generally. See for example, U.S. 3,921,630, which discloses a propylene-ethylene copolymer and U.S. 4,100,953, which suggests that medium and high density polyethylene may be
30 used for such containers. In fact, at the present, most semi-rigid containers are currently made from propylene/ethylene copolymers. U.S. 4,140,162 suggests various propylene/styrene-ethylene-butylene-styrene (SEBS) blends for a blow-molded oval container with more flexibility. It
35 is often desirable, however, that the container be in a flexible bag form to enable flat shipment of empty containers and more convenient storage.

- 2 -

Another type of medical fluid container, known to be used outside the United States, is a flexible laminate container, such as described in U.K. 2,040,263A. This film bag comprises a three layer laminate consisting of a propylene outer layer, a polyamide middle layer, and an ethylene/butylene inner layer. U.S. 4,210,686 discloses a polyolefin/SEBS blend as one layer of a laminate, with a polyolefin outer layer. The polyolefins are derived from propylene, ethylene, and 4-methylpentene-1. The laminate approach generally employs a rubbery material for softness and a high temperature material such as polypropylene or high- or medium-density polyethylene to permit very high temperature resistance during sterilization. A drawback to the laminate approach, however, is that scrap materials from the manufacture of such films cannot be reground into feedstock for the film-making equipment.

Prior art sterilizable plastic containers have heretofore been constructed of film or flexible materials having a crystalline melting point (MP) in the range of 130 to 165° C in order that they may be heat sterilized without intolerable distortion. Thus, polypropylene, with copolymers or blends, with MP's in the range 165° C have been commonly used. They have been described for use with SEBS having a melting point around 120° C. On the other hand, polyethylenes (MP 109° C to 125° C) have been used in small amounts, if at all, as softening agents. Polypropylene, however, is undesirable in that it may not be irradiated as, for instance, in radiation sterilization and in that it becomes brittle at low temperatures (around 0° C) and in that it is inherently stiff, and will spring back to its molded shape.

It is therefore among the objects of the present invention to provide a medical fluid container which has a flexible film body for flat storage and collapse, together with good low temperature flexibility in the film body, sufficient

temperature resistance to softening and/or melting during steam sterilization, and capability for radiation sterilization. Other objects of the present invention, which will become apparent from the following description include providing a container of film material which has superior optical clarity and a combination of flexibility and strength which impart superior handling characteristics over a wide temperature range.

10

Summary of the Invention

The foregoing and other objects are accomplished by a container having a flexible film body formed from a novel polymeric blend which provides superior handling characteristics and optical clarity. The blend of the present invention is based, in general terms, on the discovery that a high melting point olefin such as polypropylene or medium- or high-density polyolefin is not necessary to produce an olefin blend which may be sterilized at high temperatures without intolerable distortion. A low melting point low density polyethylene may be used as a first component provided that a second component of an elastomeric material is added which will provide shape-retaining properties.

The blend contains a first component of 30 - 90%, preferably 50 - 80%, linear low density polyethylene (LLDPE) having a density less than 0.940 g/cm^3 , preferably 0.918 - 0.935. Linear low density polyethylene (LLDPE) refers to a particular type of low density polyethylene wherein there is an absence of long chain branching. The LLDPE is selected to impart strength and flexibility.

The blend further contains a second component of 10 - 70%, preferably 20 - 50% of an elastomeric material, preferably an SEBS block copolymer wherein the styrene comprises no

more than 35% of the block copolymer. The SEBS is selected to impart strength and flexibility. It may be characterized as being substantially free of plasticizer and having a relatively high percent elongation, preferably
5 greater than 500.

The materials of the present invention further contemplate the addition of 1 - 10% of a high melt index (MI) material for improved processing properties, such as polypropylene/
10 polyethylene and LLDPE having an MI of 5 - 50.

The final blend may be autoclaved, handles exceptionally well in drop testing, has excellent low temperature properties, and may be radiation sterilized.

15 One aspect of the present invention is the use of LLDPE as a major (i.e. 50% or more) component.

20 Brief Description of the Drawing

Figure 1 is a perspective breakaway view of a medical solution container in accordance with the present invention;

25 Figure 2 is an end view of the container of Figure 1; and

Figure 3 is a detailed view of port structure of the container of Figure 1.

30

Description of the Preferred Embodiment

For purposes of describing the method of making and using
35 the present invention in clear, complete, and concise terms, a number of general principles, followed by specific examples are set forth hereinafter, so that the invention

defined by the appended claims may be practiced by one of ordinary skill in the art.

5

Selection of Materials

The first component of the present blend is a linear low density polyethylene, defined generally in the polymer art and in this specification as a commercially prepared
10 polyethylene which may contain up to 5% vinyl acetate units, up to 8% propylene units, or up to 6% C₄ - C₈ units. The linear low polyethylene preferably is selected on the basis of a density of less than 0,940 g/cm³, a melting point of less than 125°C, and a Vicat Softening Point of 90 -
15 110° C, a flexural modulus of 30 - 100 K psi, and a melt index of 0.1 - 5.

A critical feature of the present invention is the use of "linear low density polyethylene" (LLDPE). This term is
20 used herein in the sense that it is generally used in the industry, and more specifically, in the sense that it refers to polyethylene with a basically linear chain structure of having short (1 - 4 C) chain branching of 10 - 30/1000 C and having an absence of long chain
25 branching, i.e. less than 30 side chains greater than 6 C per molecule. Such material is defined herein as having a density less than 0.940 g/cm³, as distinguished from high density polyethylene and a crystalline melting point in excess of 120° C, as distinguished from melting points
30 which are typical of branched chain low density polyethylene.

The LLDPE of the present invention may be further characterized and selected from LLDPE's on the basis of its
35 relatively high molecular weight and narrow molecular weight distribution band. This is indicated by its relatively low melt index, g/10 min., which will be in the

range of 0.1 to 5, preferably 1 to 3. This material can be readily extruded or blown into film and will produce a blend which produces a film according to the present invention which is high in tensile, drop, and impact strength.

The present LLDPE may be further characterized and selected from LLDPE's on the basis of a moderate degree of crystallinity. This is indicated by its high Vicat Softening Point, greater than 90° C, which produces a blend which can be heat sterilized. Crystallinity is also indicated by a relatively low flexural modulus in LLDPE's of the present blend, on the order of 30 K psi - 100 K psi. This produces an air independent, very flexible, collapsible bag which feels limp.

Finally the present LLDPE may be characterized and selected from LLDPE's on the basis of clarity which this component imparts to the blend film, which typically will have greater than 80% transmittance and less than 30% haze.

The following are presently preferred LLDPE's.

Escorene LPX-2.04 from Exxon Chemical Company has an MI of 2.0; Density 0.918; Melting Point 121.5° C; in thin films (1.25 mil) it has a haze of 26%; Ultimate Tensile Strength (UTS) (MD) 320 Kg/cm² (4500 psi), UTS (CD) 250 Kg/cm² (3500 psi).

Dowlex 2045 from Dow Chemical Company has an MI of 1.0; a density of 0.920; Vicat 100° C; UTS (MD) 6500 psi, CD 5100 psi. Dowlex 2440 has an MI of 4.0; a density of 0.935; Vicat of 117° C; and 18% haze.

Turning now to the selection of the second component, the styrene-ethylene-butylene-styrene (SEBS) will be characterized by terminal styrene blocks and a central ethylene/

butylene block in a linear chain. The present material may be further characterized and selected from other SEBS's currently available on the basis of several critical factors, one of which is the ratio of crystalline, rigidifying styrene component to rubbery middle block component, which will generally be in the range of 25 - 35/65 - 75. Another critical factor is that the SEBS be substantially free of additives, in that some SEBS materials comprise 25 - 50 wt% plasticizer oil. The present SEBS also has a tensile strength of 3000 - 5000 psi, ASTM 0412. Presently preferred SEBS materials are Kraton G 1650, tensile strength (ASTM D412), 5000, styrene/rubber ratio 28/72; 1651, tensile strength 3000, styrene/rubber ratio 33/67; and 1652, tensile strength 4500, styrene/rubber ratio 29/71. Kraton is a registered trademark of Shell Chemical Company.

The SEBS material used herein is further described in U.S. Patent No. 3,595,942. It may be expected that other rubbery materials such as ethylene propylene copolymer and ethylene propylene diene may be found suitable as well.

Turning now to the selection of the optional third component of a high melt index material, such a material will generally be a polyolefin so as to be compatible with the LLDPE and SEBS and have a melt index of 5 - 50. Presently preferred materials are Shell PP5820 polypropylene from Shell chemical Co. and Escorene LPX-16 LLDPE with the following pertinent properties:

Physical Property	ASTM Method	Shell PP5820	Escorene LPX-16
Melt Index, g/10 min	D1238E	--	12
Melt Flow, g/10 min	D1238L	12	--
Melting Point, ° C	--	168	123

CUT-74

In other words, a relatively high MI and MP are desired. Also, a high elongation and other properties desirable in the first two components are desirable.

- 5 Acrawax-C[™] N, N¹ ethylene bis stearamide from Glyco chemicals, with 0.970 density and 140 - 145° C melting point range may be added in a conventional manner in up to 0.5% of the present blend to act as an antiblocking agent.
- 10 Finally up to 1% conventional antioxidants such as Anti-oxidant 330 from Ethyl Corp., 1,3,5-trimethyl-2,4,6-tris (3,5-ditertiary butyl-4-hydroxybenzyl) benzene may be used in the present blend.

15

Example I

All percentages set forth in this specification are by weight, and all test methods are as set forth in this

20 Example I.

49.9% LPX 2.04 LLDPE, 49.9% Kraton G 1652, and 0.2% Ethyl 330 antioxidant were dry blended in a ribbon blender at 30 rpm for 30 minutes, then extruded at 400 ± 5° F into a slot

25 dies and calendered to obtain 7, 12, and 14 mil films in a 30 inch wide web with an extruder/calender machine which had a two stage screw with a mixing head. A homogenous blend was obtained to yield clear and flexible films. The films were subsequently formed into 1 liter rectangular

30 pouches with an impulse sealer, and then filled with water, sealed at a relatively low temperature (270° F) and sterilized at 115° C for 30 minutes. Pouches were sterilized in this and subsequent Examples with over pressurization. This is, compressed air is introduced into

35 the autoclave to prevent pressure in the pouch from rupturing the pouch, especially at the steam condensation point. The pouches maintained their integrity after

vibrating at 240 cycles per minute with a 1 G force and being dropped from a 6 foot height. The material of Example I had a .43 MI and 76° C Vicat softening point. The pouch shapes were maintained with 10% shrinkage. The 7 mil film was practically colorless, with thicker films having slight haze.

The shelf life of the foregoing blend has been calculated as 3.1 years for 12 mil film and 2.6 years for 7 mil film, based on time to 5% moisture loss.

This blend generally has excellent physical and chemical properties for a medicinal solution container, including minimum blushing; high flexibility; excellent elongation, in excess of any comparable material; and high impact strength. It may also be readily sealed to other materials, such as polypropylene, used in closures. The blend, however, has a relatively low MI and may beneficially be modified by addition of up to 10% of a third component such as polypropylene to produce a 45:45:10 blend.

Example II

79.8% LPX 2.04 LLDPE, 20.0% Kraton G 1652 SEBS, and 0.2% Ethyl 330 anti-oxidant were dry blended in a ribbon blender for 30 minutes at 20 rpm, then transferred to an extruder/calender machine for melt homogenization with a 3.94 inch diameter screw having 5 feed flights, 5 transition flights, 8 metering flights, 3 flight lengths of mixing section, and a second stage of 3 metering flights. The extruder, with 24/1-L/D ratio and 4/1 compression ratio, fed the melted blend through a 39 inch wide slot die with .030 inch die gap into the nip of 260° F calender rolls for subsequent roll release, cooling, edge trim slitting, and windup at 30 inch wide rolls with .007 inch and .012 inch gages.

CUT-74

The film had the following properties:

	<u>Blend Properties</u>	<u>Test Method</u>	<u>Value</u>
	Melt Index, g 10 min	ASTM D 1238-79	1.13
5	Vicat Softening Point, ° C	ASTM D 1525-76	90

The 1 liter pouches maintained their shape and good clarity after sterilization at 115° C and vibration (shipping) test film clarity measured 31% haze and 87% transmittance.
10 Shrinkage was 7%. Greater than 10 drops from 6 feet were required to rupture the .012 inch gage pouches, while the .007 inch pouches maintained their integrity after 6 drops from 6 feet.

15 This blend retains the beneficial properties of the blend of Example I with the advantage of cost savings balanced against some loss in impact strength and heat resistance. Low temperature properties, barrier properties, and heat sealing properties are enhanced by higher amounts of LLDPE.

20

Example III

50% LPX 2.04 LLDPE and 50% Kraton G 1650 were tumble
25 blended and then pelletized in a 1½ inch laboratory extruder, 24:1 LD ratio and a two stage screw with a mixing head. The next day the pellets were extruded into a 7 mil thick cast film.

30 The film looked clear and flexible, with a very slight haze and no color at all. The film had good tear strength and stretchability. The film could be easily heat sealed at 270° F + 10 psi air clamping pressure to give very strong seals. The film had excellent impact strength. Ports from
35 the same or similar material could be easily sealed with an impulse, heat or ultrasonic sealer. The film had excellent strength and elongation. A one liter pouch filled with

water was repeatedly dropped from 6 foot height without breaking.

5 Film according to Example III can be easily steam sterilized. An empty pouch with only air inside or water inside can be sterilized at a temperature up to 120° C without excessive deformation, blocking or blushing. To be able to sterilize a bag in the empty condition or with only a small amount of liquid in it has particular significance for
10 blood or pooling bag application. Some materials that block excessively are excluded from this type of use or may require special processing in the sterilizer to avoid blocking when hot.

15 Barrier Properties

8 mil thick film has the following barrier properties as measured on a Mocon film permeability instrument from Modern Controls, Inc., Elk River, MN:

20

The CO₂ transmission was 5880 cm³/m²/day at 1 atm., room temperature; and

25

The O₂ transmission was 970 cm³/m²/day at 1 atm., room temperature.

The Vicat softening point of the blend is 76° C.

30 Example III demonstrates a cast film with properties particularly desirable in a blood bag application as well as a solution container. For example, it can be sterilized empty and it has CO₂ and O₂ transmission approximately twice that of a standard DOP-plasticized PVC bag, allowing extended blood storage time.

35

CUT-74

- 12 -

Example IV

60% LPX 2.04 and 40% Kraton G 1650 were weighed into a ribbon blender. To the blend, 0.5 PHR of anti-oxidant
5 Ethyl 330 and 0.1 of Acrawax-C™ were added and then ribbon blended at 20 RPM for 30 minutes. 10 pounds of this material were molded for ASTM test samples at 250° C. The other 10 pounds were pelletized by extruding through a
10 laboratory twin screw extruder at 183° C. The next day the pellets were extruded through a single screw extruder at 209° C into blown film of about 8 mil thickness in lay flat tube of 3 inch diameter.

The film had the following properties:

15

20

25

30

35

CUT-74

Test Method

Blend Properties

	Melt Index, g/10 min.	ASTM D 1238-79	0.62
5	M.P., °C	DSC 75	115° C, 121° C
	Vicat Softening Point, °C	ASTM D 1525-76	84° C

Radiation Sterilization

	Injection Molded Samples		<u>Before</u>	<u>After</u>
10	Tensile at Break, psi	ASTM D 638-77a	1800	1924
	Elongation, %	ASTM D 638-77a	627	644
	Color	ASTM D 2849-69	V. slight yellow	slight yellow

Low Temperature Brittleness

15	Injection Molded Samples	ASTM D 746-79	<-100° C
	Film Pressouts	ASTM D 1790-62	<- 76° C

Heat Sealing Properties Film

20	Impulse Sealing	Excellent
	Thermal Bar Sealing	Excellent
	Sonic Welding	Excellent
	Color	Colorless

25 Strength Properties

Injection Molded Samples (as molded)

	Tensile yield, psi	ASTM D 638-77a	902
	Elongation, %	ASTM D 638-77a	627

30 Flexibility (Flex modulus)

	Injection Molded Samples	ASTM D 790-78	22 K
--	--------------------------	---------------	------

35 The film was clear and very flexible, with good tear resistance and excellent stretchability.

- 14 -

The lay flat tube was filled with 500 ml of water and sealed at both ends into pouches. The pouches were sterilized at 115° C using 25 psi overpressure for 45 minutes. Very little shrinkage and blushing was observed. 5 The pouches passed repeated (over 10) drop tests from six feet onto concrete.

An injection molded sample was exposed to 2.5 Megarad gamma radiation. It showed that, overall, the physical 10 properties of the present blend are not significantly affected by radiation sterilization. Test results on other blends confirm this observation.

The low temperature brittleness data demonstrates the 15 flexibility of this blend at low temperatures. These properties were also observed in connection with other blends, containing LPX 2.04 and 30% and 80% Kraton.

20

Example V

62% LPX 2.04, 30% Kraton G 1650, and 8% Shell PP5820 (polypropylene) were ribbon blended with 0.5% Ethyl 330 Antioxidant and 0.1% Acrawax-C at 20 rpm for 30 minutes. 25 10 pounds were molded for test samples and 10 pounds were extrusion homogenized in a Haake TW-100 laboratory twin screw extruder with a single strand die and pelletized. The pellets were then re-extruded in a single screw extruder with a one inch blown film die to obtain a lay 30 flat film tube of about 3 inch diameter.

The film was heat sealed at 270° F and 10 psi to form 500 ml water-filled pouches. These were sterilized at 115° C in a steam sterilizer using 27 psi overpressure followed by 35 air cooling. All pouches survived sterilization without blushing and exhibited excellent clarity, stretchability, impact resistance, and tear resistance.

CUT-74

The pouches were then radiation sterilized by the method of Example V. Again, no significant loss of properties was observed.

- 5 The pouches were also tested for low temperature brittleness by the method of Example IV. Again, excellent low temperature properties were observed.

The film had the following properties:

10

Melt Index, g/10 min.	1.2
M.P., °C DSC	115, 121, 161
Vicat Softening Point, °C	92.6

15

Radiation Sterilization

Injection Molded Samples

<u>Before</u>	<u>After</u>
---------------	--------------

Tensile at Break, psi	2110	2207
-----------------------	------	------

Elongation, %	733	706
---------------	-----	-----

Color	off white	very slightly yellow
-------	-----------	----------------------

20

Flex modulus psi	25 K	31
------------------	------	----

Low Temperature Brittleness

25

Injection Molded Samples	<-100° C
--------------------------	----------

Film Pressouts	<- 76° C
----------------	----------

Strength Properties

Injection Molded Samples

30

Tensile, psi	1136
--------------	------

Elongation, %	733
---------------	-----

35

CUT-74

Example VI

50% Dowlex 2440 and 50% Kraton G 1652 were blended in a ribbon blender at 20 RPM for 30 minutes, followed by melt
5 blending on a two roll mill at 350° F. This blend was then heat pressed into a 15 - 20 mil film and an ASTM injection molded test sample and tested.

10 The heat pressed sheet looked soft and flexible with slight haze, with good tear resistance and stretchability.

5 x 10 inch pouches of this film with 1 liter of water were sterilized at 115° C successfully. The film blushed, but exhibited no deformation. Sterilized bags easily pass six
15 foot drop test. Excessive blushing makes this material unsuitable for an IV container but is useful for applications where clarity is not an issue, such as a blood bag, plasma pooling bag, etc.

20 This material had a Vicat softening point of 94° C.

This Example shows the use of a relatively higher density LLDPE to produce a material which, while still meeting accepted criteria for a medical solution container,
25 represents a trade off of higher temperature resistance, lower clarity, and less impact resistance.

Example VII

30 70% Dowlex 2045 and 30% Kraton G 1652 were tumble blended and homogenized on a 2 roll mill at 325° F, then pressed out at 320° F under 10 psi for 1 minute into 0.015 - 0.020 inch sheets and ASTM test samples.

35 The film sheets looked soft and flexible with only very slight haze. The film had good tear resistance and

excellent stretchability. The film can be easily heat sealed at 270° F with 10 psi air pressure. Seals were good and very strong. The film had excellent impact strength. A 5" x 12" one liter bag with water passed six foot drop tests repeatedly and consistently.

Pouches made from the sheets were sterilized at 115° C successfully without excessive deformation or blushing.

The Vicat softening point of this blend is 78° C.

This Example shows the use of an LLDPE of a low molecular weight (low MI) with a low flexural modulus (38 K) and low yield strength (18 K psi) to produce a very flexible film with a high LLDPE content that is cost effective.

Examples VIII and IX

A blend of 80% G 1650 and 20% Dowlex 2045 was formed into a blend but exhibited extremely low melt index and would not run on an extruder.

A blend of 90% LPX-2.04 and 10% Kraton G 1652 was blended, cast into film and formed into pouches. This material was found to have insufficient flexibility for impact testing.

These examples, taken in conjunction with those preceding, demonstrate the aspect of the present invention wherein superior desirable properties in a medical solution container are obtained through the use of LLDPE as a major component, i.e. 50 to approximately 90%.

Example X

A film sample of 50% LPX-2.04 and 50% Kraton G 1650 was tested by extraction of 6000 cm²/l with distilled H₂O at 70° C for 24 hours. The extract was tested as follows: non-volatile residue 6.4 mg/l; oxidizable substances 0.4 mEq KMnO₄/l. This shows significant improvement over PVC plasticized with DEHP, which has typical test values of 0.2 mg/l non-volatile residue and 0.6l oxidizable substances.

10

Medical Solution Container

The flexible film material of the present invention may be manufactured by several processes and fabricated into several types of containers.

The presently preferred method of manufacture of the present film material is in the form of cast or blown film 5 - 20 mil thick created from dry blended resin components in commercially available equipment, as described in the preceding Examples. The present film material, however, may also be blow molded into flexible film containers from injection molded parisons utilizing commercially available blow molding equipment.

The presently preferred container is shown in Figure 1. Illustrated therein is an autoclaved sterilized 250 ml container containing 50 - 100 ml of injectable fat emulsion, for parenteral application via a conventional non-vented I.V. administration set having flexible tubing, a patient delivery needle, and a spike for insertion into a container.

The container comprises two sheets of film 10, 12 which have been heat-sealed or impulse-sealed along two parallel



0114964

- 19 -

sides 14, 16 and along a hanger end 18 as described hereinafter.

5 The hanger end 18 comprises an aperture 20, defined by the heat-sealed area so that the container may be hung from a conventional I.V. stand.

10 Opposite the hanger end 18, and generally parallel thereto is a port end member 22 comprising a planar base portion 24 having a thickness of about .03 inch and being in the approximate shape of a hexagon with two parallel longer side portions 26, 28 parallel to the widths of the film sheets 10, 12 and, at each end, a pair of angled side portions 30, 32 joined in an acute angle at a sharp edge portion 33, as shown in Figure 2. The planar base portion is continuously bounded at its edge by a flange portion 34 extending approximately one half inch above and below the base portion at right angles thereto. The flange portion thereby forms a continuous band around the base portion in the configuration of the base portion and provides a smooth, continuous surface having parallel sharp edges, as shown at 33, for bonding to the two film sheets 10, 12. The port end member 22 is inserted between the two film sheets, which have previously been joined on three sides, and heat sealed to the film by two shaped jaws. The film extends slightly beyond the length of the port end member in two ears 36, 38, whereat the film is joined to itself, the film layers each being continuously joined to the port end member along their intermediate portions between the ears to form a closed container ready to be filled.

35 The preferred method of filling the present container comprises the provision in a first heat sealing operation of two openings 40, 42 in the continuous heat seal across the hanger end. After the container has been formed, a fill tube is inserted into either of the two openings and solution is pumped into the container. The hanger end is

CUT-74

then completely sealed in a second heat sealing operation which seals the two openings 40, 42.

5 The present blends have been found to be compatible with port end members made from commercially available polypropylene. The present blends may also themselves be readily injection molded into formed components disclosed herein, as well as tubing, etc.

10 The port end member 22 is provided with a pair of circular apertures in its base portion 24, through which extend first and second port assemblies 44, 46 for receiving a syringe needle and an administration set, respectively. These port assemblies are shown in detail in Figure 3.

15 The first port assembly 44 extends generally in a cylindrical shape along a central axis 45 from inwardly of the container to outwardly of the container, as defined by base portion 24.

20 The first port assembly 44 comprises a stepped tubular member 48 extending from inside the planar base 24 to a closed, frangible tip section 74; a cylindrical diaphragm member 76 extending well inside the container and terminating in a diaphragm 82; a septum 62; and a port protector 25 84 surrounding the frangible tip.

The stepped tubular member 48 comprises a main cylindrical section 50 with a radially inwardly stepped portion 52 at a container-external axial end thereof, with the tubular 30 portion thereabove being radially smaller to define an outer ledge portion 54 above the inwardly stepped portion 52. At its opposite end, the stepped tubular member 48 comprises a radially outwardly extending seat portion 56 terminating circumferentially in an axially extending lip 35 58 and a radially outwardly extending flange 60. The flange 60 is sonic-welded or otherwise joined to the base

portion 24 on the container-internal side, the lip portion 58 extending in sealing relationship through an aperture in the base portion 24.

5 A rubber septum 62 is inserted into the tubular member 48 from the container-inward side. It comprises a disc portion 64, a cylindrical side portion 66 extending axially therefrom and a radially outwardly stepped portion 68 which seats against the stepped portion 52 of the tubular member
10 48. The disc portion 64 seats against a radially inwardly stepped portion 70 of the tubular member 48, which terminates radially inwardly in a thinned angular portion 72 curving sharply to a tapered, axially extending close-ended tubular portion 74 which serves as a cover for
15 the rubber septum 62. In use, the closed tubular portion 74 may be snapped off along thinned angular portion 72 to expose the rubber septum 62 which provides a resealing closure when medicaments or the like are injected into the container through a hypodermic syringe.

20 A cylindrical diaphragm member 76 is next inserted into the assembly. It is generally cylindrical having a radially outwardly extending flange 78 in an intermediate portion which fits into the seat portion 56 of the stepped tubular
25 member 48. The cylindrical diaphragm member 76 extends inwardly into the container in two segments, one being shown in Figure 3 at 80. The diaphragm member terminates outwardly from the container in a thinned circular portion 82 extending across the stepped tubular member 48 and
30 abutting the rubber septum 62 to hold the latter in place. The diaphragm can be easily penetrated by a syringe needle.

Finally, a port protector 84 is slipped over the frangible closed tubular portion 74 and seated on the outer ledge
35 portion 54 of the stepped tubular member 48. The port protector 84 is generally in the configuration of an open-ended cylindrical tube and is slip fit or heat bonded

onto the tubular member to provide a tamper-evident closure.

Referring now to the second port assembly 46, a spike port
5 is provided thereby which uses substantially identical
components as those described in connection with the first
port assembly. A second stepped tubular member 86 is
provided with a second stepped portion 88, outer ledge
portion 90, seat portion 92, lip 94, and flange 96 as
10 described in connection with the first stepped tubular
member 48. The flange 96 is fixed to the base portion 24
of the port end member 22 in a similar manner. The second
stepped tubular member 86 further comprises a thinned
angular portion 98 curving sharply to a tapered, axially
15 extending tubular portion 100 which serves as a port cover
and may be snapped off as described in connection with the
first tubular member 48.

A second inner diaphragm member 102 is formed and inserted
20 in a manner substantially identical to that described in
connection with the inner cylindrical diaphragm member 76.
A thinned circular portion 104 of the second inner dia-
phragm member 102 serves as the primary inner closure in
the second port assembly, there being no rubber septum, and
25 is constructed to receive a spike in a conventional non-
vented I.V. administration set. The inner segmented
portion 106 of the second inner diaphragm member 104 does
not extend to a container-internal direction to the extent
of the segments of portion 80 of the first inner diaphragm
30 member since the first segments protect against needle
puncture of the bag, and the second segments serve to
receive and grip the spike. The segments, extending to the
base 24 of the hanger end member, provide complete emptying
of the bag when it is hung from the hanger end.

35 A second port protector 108, substantially identical to the
first-described port protector 84 is slip fit or otherwise

affixed to the second stepped tubular member 86 to prevent accidental breaking of the frangible section and to permit easy removal of the port protector.

- 5 Although the present material has been described in connection with an intravenous solution container, it is also been found useful in forming a conventional blood bag. The film material, as discussed in connection with the foregoing examples, has excellent low temperature
- 10 properties, which are important for blood bags used to produce cryoprecipitates and the like. The film material also may be fabricated with a high degree of gas transmission, which is vital to platelet survival.
- 15 Finally, it should be noted that the film material may be useful in a container for fat emulsion. It is particularly advantageous for this application due to its extremely low level of fat-soluble extractable materials. PVC, in contrast, contains plasticizers and trace ingredients which
- 20 make it unsuitable as a fat emulsion container. As used in a fat emulsion, the present material may be fabricated as described in connection with Figures 1 - 3, and a foil laminate overwrap used to enclose the container to prevent gas permeation from damaging the fat emulsion.
- 25 An air impermeable overwrap 112 is shown diagrammatically in Figure 2, and simply consists of a completely enclosed, sealed pouch which contains the film bag. The pouch is preferably flushed with nitrogen prior to sealing. The
- 30 pouch may be formed of 2 - 10 mil thick films of polymer-aluminum foil laminate with suitable antiblock. The blends of the present invention exhibit very high CO_2 and O_2 permeability which may damage certain solutions such as fat emulsions. It may therefore also be desirable to fabricate
- 35 a container using the present material wherein the overwrap is formed by a laminate construction with an air-impermeable layer.

CLAIMS:

1. A polymer blend comprising:
 - a) a first component of 30 - 90 %, by weight, based on (a)+(b), of linear low density polyethylene material; and
 - 5 b) a second component of 10 - 70 %, by weight, based on (a)+(b), of SEBS elastomeric polymer.
2. A polymer blend according to Claim 1, characterized in that said first component makes up 50 - 80 % of said blend.
- 10 3. A polymer blend according to Claim 1 or 2, characterized in that said second component makes up 20 - 50 % of said blend.
4. A polymer blend according to any of Claims 1 to 3, characterized in that said first component has a
15 density of 0.918 - 0.935 g/cm³, a melting point less than 125° C and a Vicat softening point in excess of 90°C.
5. A polymer blend consisting essentially of:
 - (a) a first component of 30 - 90 %, preferably 45 - 62 %, by weight, based on entire blend, of linear low
20 density polyethylene material;
 - (b) a second component of 10 - 70 %, by weight, based on blend, of SEBS; and, optionally,
 - (c) a third component of 1 - 10 %, by weight, based on blend, of polyolefin having an MI of 5 - 50.
- 25 6. A polymer blend according to any of Claims 1 to 5, characterized in that said first component is further

characterized by a melt index of 0.1 - 5.

7. A polymer blend according to any of Claims 1 to 6, characterized in that said third component is linear low density polyethylene or polypropylene.

5 8. A polymer blend according to any of Claims 1 to 7, characterized in that said second component of SEBS elastic polymer is substantially free of additives and has a styrene to rubber ratio of 25 - 35/65 - 75.

10 9. A container comprising a spike port, a medicinal entry port, and an air impermeable overwrap formed from a flexible film of a polymer blend as defined in any of Claims 1 to 8.

15 10. A container according to Claim 9, characterized in that said spike port and medicinal entry port are formed of essentially the same material as said flexible film.

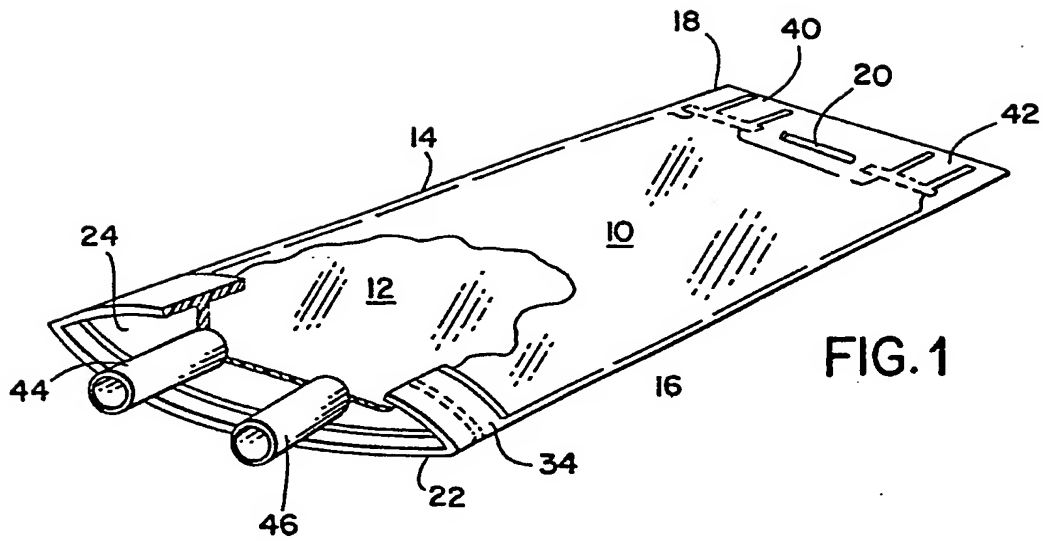


FIG. 1


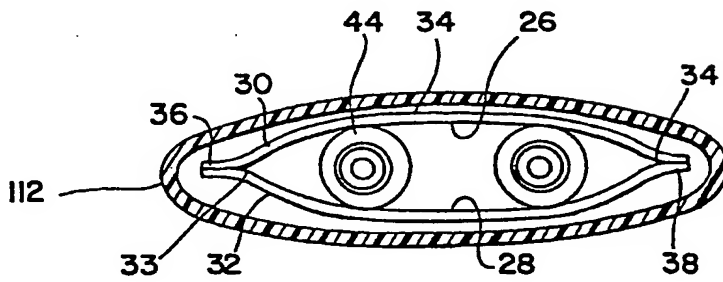


FIG. 2



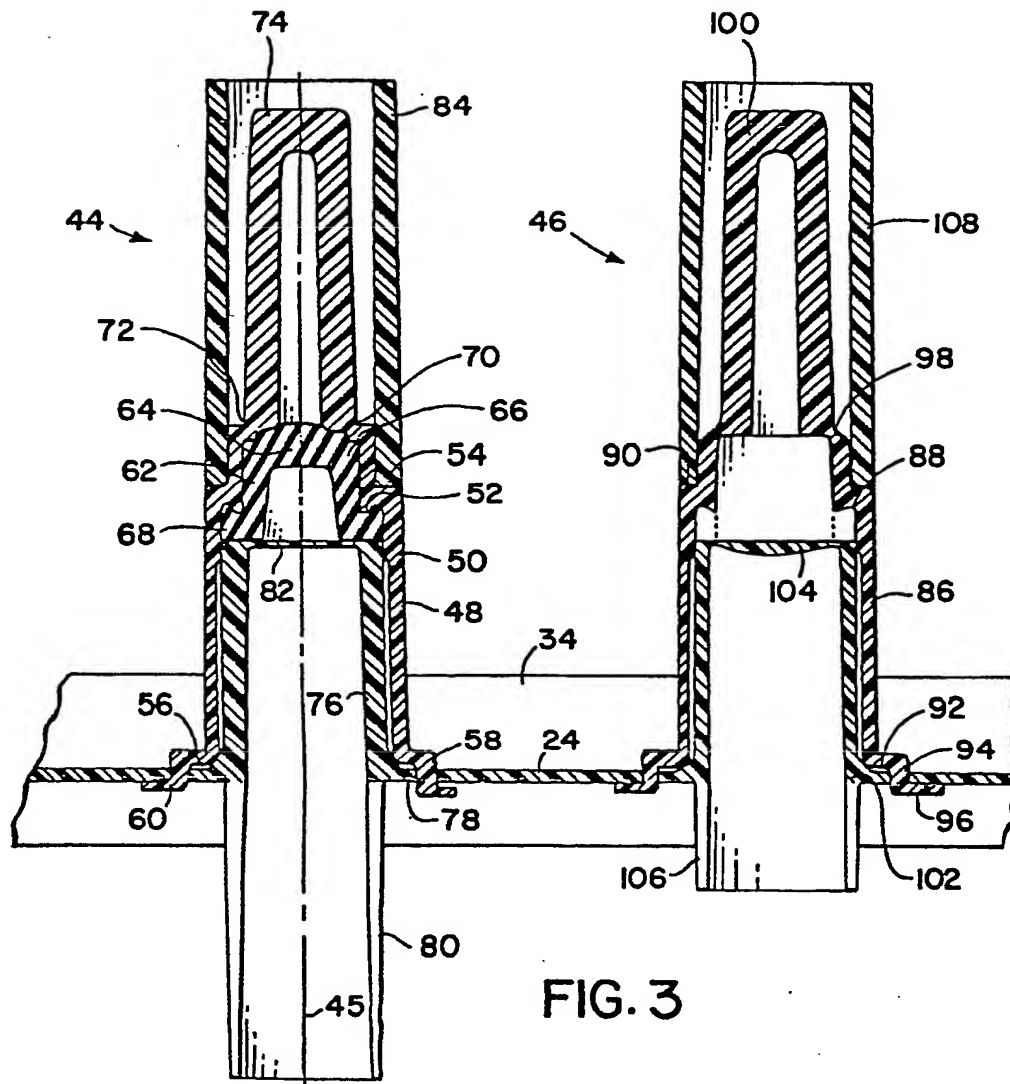

European Patent
Office

EUROPEAN SEARCH REPORT

0114964

Application number

EP 83 11 1741

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
A	GB-A-2 016 482 (BAXTER) * Abstract; page 1, line 23 - page 2, line 31 *	1-8	A 61 J 1/00 C 08 L 23/04 C 08 L 53/00
A	GB-A-2 065 067 (TOPPAN PRINTING) * Claim 1 * -----	9,10	
			TECHNICAL FIELDS SEARCHED (Int. Cl. 7)
			A 61 J C 08 L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 18-04-1984	Examiner GOOVAERTS R.E.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	